VT INDUSTRIES

STILE & RAIL DOOR ELEVATIONS

JOB NUMBER: _____ PAGE: _____ / _____

JOB NAME: _____

STANDARDS:* Top Rail: 6" Bottom Rail: 10" Stile: 6" Muntin: 1/2" Glass Thickness: 1/4"

*Non-Rated Only

☐ Heritage ☐ Artistry

☐ **SS3091**

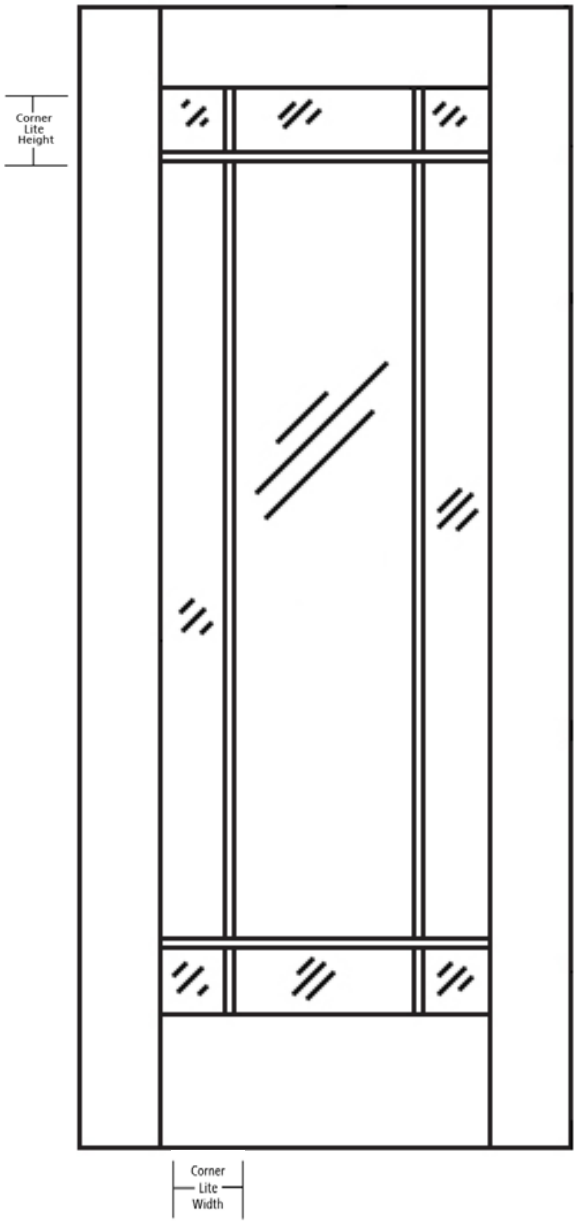

Dimensions

☐ Standard - see above

☐ Custom - fill in below

Top Rail: _____

Bottom Rail: _____

Hinge and Lock Stiles: _____

Corner Lite Height: _____
(4" Minimum)

Corner Lite Width: _____
(4" Minimum)

Sticking

Heritage Collection
- ☐ H1-Ovolo
- ☐ H2-Square
- ☐ H3-Ogee
- ☐ Other – Supply Drawing

Artistry Collection
- ☐ A1
- ☐ A2
- ☐ A3
- ☐ A4
- ☐ A5
- ☐ A6
- ☐ A7
- ☐ Other- Supply Drawing

Glass**

Supplied By:	Thickness/Type
☐ VT ☐ Other	☐ 1/4" Tempered*** ☐ 1/4" Wire ☐ Other: _____

**Glass opening dimensions will vary depending on prefit door size

***If diagonal dimension of tempered glass is less than 13", glass will be substituted with laminated safety glass

Dimensions are to cutout (do not include sticking height). Glass dimensions will vary depending on prefit door size

Rev. 3/11

VT INDUSTRIES INC.
ARCHITECTURAL WOOD DOORS
800.827.1615
WWW.VTINDUSTRIES.COM/DOORS
1000 INDUSTRIAL PARK
P.O. BOX 490
HOLSTEIN, IA 51025